

RHINO BATTERIES

ISO 9002 DISTRIBUTED EXCLUSIVELY BY EMPIRE



NON-SPILLABLE SEALED RECHARGEABLE BATTERY SLA 10-6 6V, 12Ah


☆ SPECIFICATION

- NOMINAL VOLTAGE : 6 V
- NOMINAL CAPACITY(20 hrs) : 12 Ah
- DIMENSIONS
 - TOTAL HEIGHT : 100 mm (3.94 inches)
 - CONTAINER HEIGHT : 94 mm (3.70 inches)
 - LENGTH : 151 mm (5.95 inches)
 - WIDTH : 50 mm (1.97 inches)
- WEIGHT : APPROX 2.10 Kg (4.63 lbs)
- MAX DISCHARGE CURRENT : 150/180 A (5 sec)
- STANDARD TERMINALS : FASTON TAB 187/250
- CONTAINER MATERIAL : GENERAL GRADE ABS


☆ CHARACTERISTICS

- CAPACITY 25 °C / 68 °F
 - 20 hr @ 0.6 A : 12 Ah
 - 5 hr @ 1.92 A : 9.6 Ah
 - 1 hr @ 7.2 A : 7.2 Ah
 - 1 C @ 12 A : 6 Ah
- INTERNAL RESISTANCE : 10 mΩ
- CHARGING VOLTAGE (20°C , 68 °F)
 - STANDBY USE : 2.275 ± 0.025 V/CELL
 - : (-3.3mV / °C / CELL)
 - CYCLE USE : 2.275 ± 0.025 V/CELL
 - : (-5mV / °C / CELL)
- MAX CHARGING CURRENT : 3.6 A


Discharge Characteristics 20 °C (68 °C)

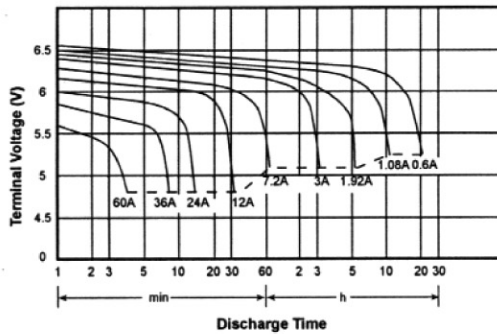


Discharge Current vs Time

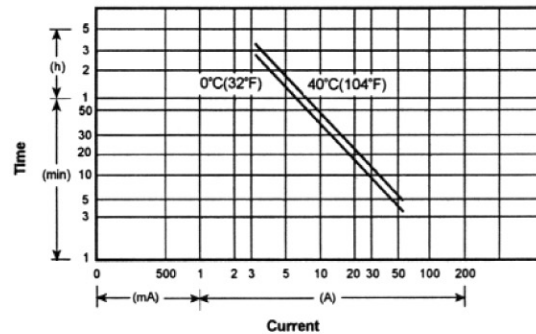

☆ Dimensions

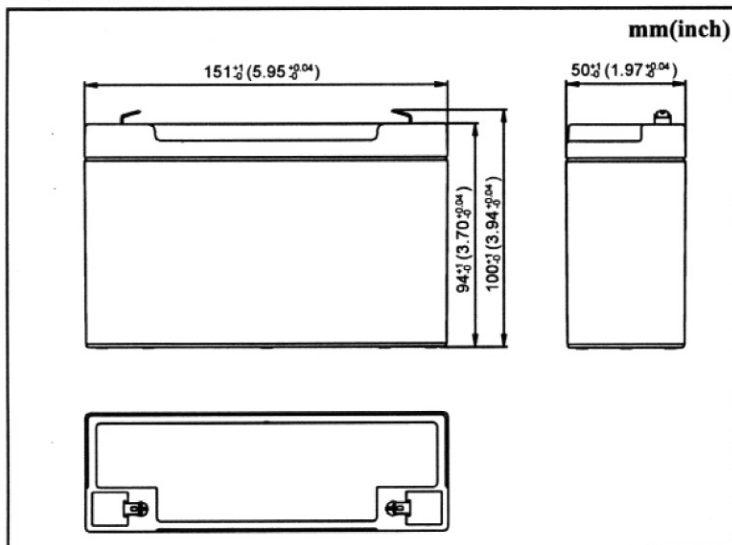

☆ Terminal

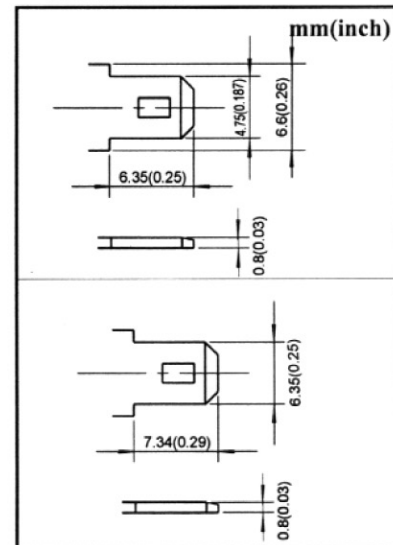

Empire Scientific
151 East Industry Ct.
Deer Park, NY 11729
Phone: 1.800.645.7220 Fax: 1.800.343.5733
Visit us on the Web: <http://www.empirescientific.com>
Email: Sales@empirescientific.com