RHINO BATTERIES

ISO 9002 DISTRIBUTED EXCLUSIVELY BY EMPIRE

NON-SPILLABLE SEALED RECHARGEABLE BATTERY
SLA 24-12 12V, 26Ah

☆SPECIFICATION

- NOMINAL VOLTAGE : 12 V
- NOMINAL CAPACITY(20 hrs) : 26 Ah
- DIMENSIONS
  - TOTAL HEIGHT : 125 mm (4.92 inches)
  - CONTAINER HEIGHT : 125 mm (4.92 inches)
  - LENGTH : 166 mm (6.54 inches)
  - WIDTH : 175 mm (6.89 inches)
- WEIGHT : APPROX 8.80 Kg (19.40 lbs)
- MAX DISCHARGE CURRENT : 150 A (5 sec)
- STANDARD TERMINALS : BOLT & NUT
- CONTAINER MATERIAL : GENERAL GRADE ABS

☆CHARACTERISTICS

- CAPACITY 25 ℃ / 68 ℉
  - 20 hr @ 1.2 A : 26 Ah
  - 5 hr @ 4.16 A : 20 Ah
  - 1 hr @ 15.6 A : 15 Ah
  - 1 C @ 26 A : 13 Ah
- INTERNAL RESISTANCE : 10 mΩ
- CHARGING VOLTAGE (20℃ , 68 ℉)
  - STANDBY USE : 2.275 ± 0.025 V/CELL
  - : (-3.3mV / ℃ / CELL)
  - CYCLE USE : 2.275 ± 0.025 V/CELL
  - : (-5mV / ℃ / CELL)
- MAX CHARGING CURRENT : 7.8 A

Discharge Characteristics 20 ℃ (68 ℃)

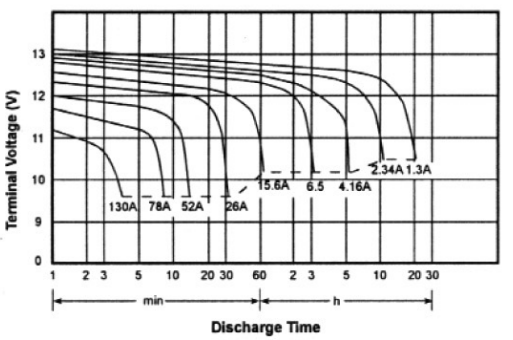

Discharge Current vs Time

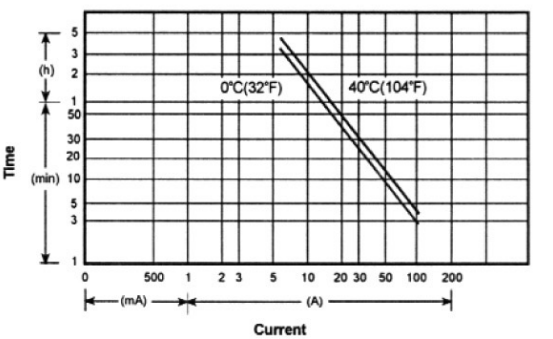

☆Dimensions

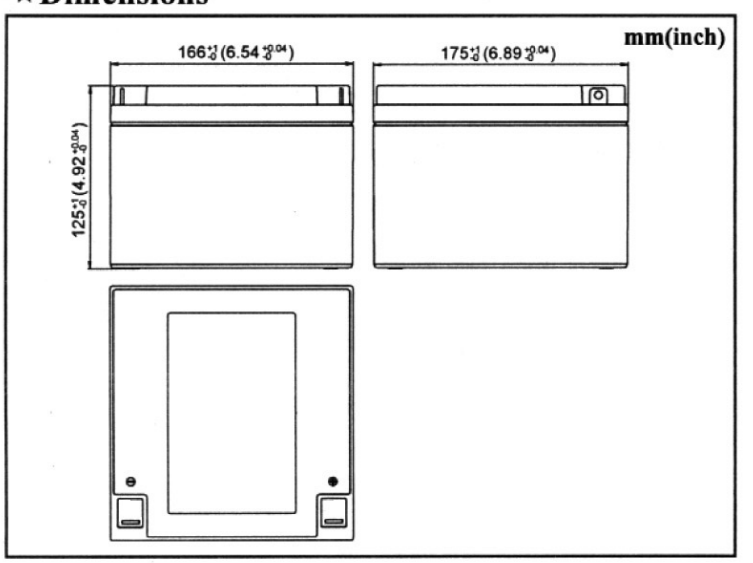

☆Terminal

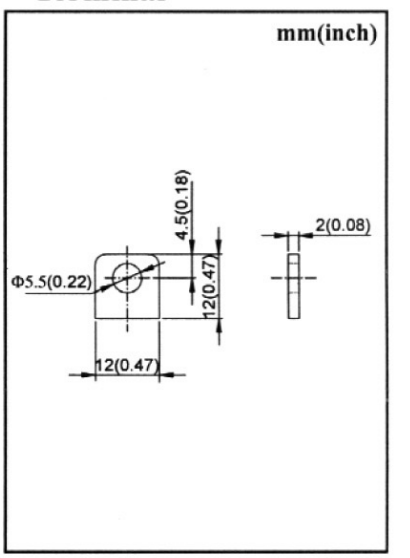

Empire Scientific
151 East Industry Ct.
Deer Park, NY 11729
Phone: 1.800.645.7220 Fax: 1.800.343.5733
Visit us on the Web: http://www.empirescientific.com
Email: Sales@empirescientific.com