

RHINO BATTERIES

ISO 9002 DISTRIBUTED EXCLUSIVELY BY EMPIRE



NON-SPILLABLE SEALED RECHARGEABLE BATTERY

SLA 4.5-4 4V, 4.5Ah


☆ SPECIFICATION

- NOMINAL VOLTAGE : 4 V
- NOMINAL CAPACITY(20 hrs) : 4.5 Ah
- DIMENSIONS
 - TOTAL HEIGHT : 107 mm (4.21 inches)
 - CONTAINER HEIGHT : 101 mm (3.98 inches)
 - LENGTH : 47 mm (1.85 inches)
 - WIDTH : 47 mm (1.85 inches)
- WEIGHT : APPROX 0.62 Kg (1.37 lbs)
- MAX DISCHARGE CURRENT : 40 A (5 sec)
- STANDARD TERMINALS : FASTON TAB 187
- CONTAINER MATERIAL : GENERAL GRADE ABS


☆ CHARACTERISTICS

- CAPACITY 25 °C / 68 °F
 - 20 hr @ 0.225 A : 4.5 Ah
 - 5 hr @ 0.72 A : 3.6 Ah
 - 1 hr @ 2.7 A : 2.7 Ah
 - 1 C @ 4.5 A : 2.25 Ah
- INTERNAL RESISTANCE(20°C , 68 °F) : 12 mΩ
- CHARGING VOLTAGE (20°C , 68 °F)
 - STANDBY USE : 2.275 ± 0.025 V/CELL
 - : (-3.3mV / °C / CELL)
 - CYCLE USE : 2.45 ± 0.05 V/CELL
 - : (-5 mV / °C / CELL)
- MAX CHARGING CURRENT : 1.35 A


Discharge Characteristics 20 °C (68 °C)

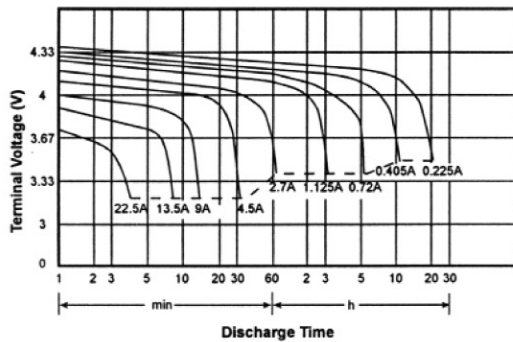


Discharge Current vs Time

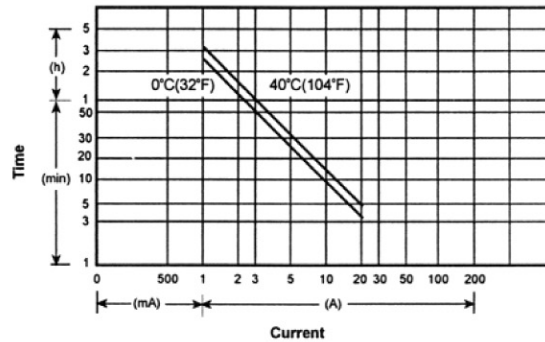

☆ Dimensions

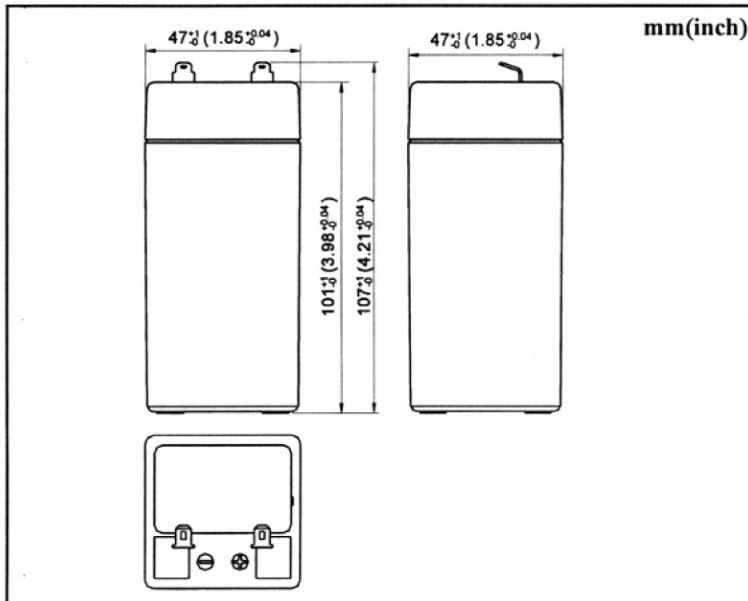

☆ Terminal

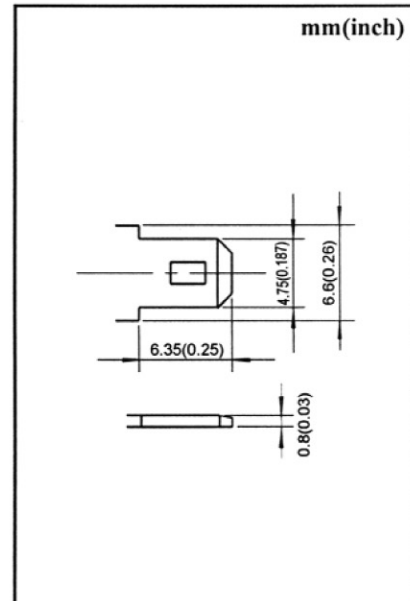

Empire Scientific
 151 East Industry Ct.
 Deer Park, NY 11729
 Phone: 1.800.645.7220 Fax: 1.800.343.5733
 Visit us on the Web: <http://www.empirescientific.com>
 Email: Sales@empirescientific.com