

RHINO BATTERIES

ISO 9002 DISTRIBUTED EXCLUSIVELY BY EMPIRE



NON-SPILLABLE SEALED RECHARGEABLE BATTERY

SLA9-12 12V,9Ah



☆ SPECIFICATION

- NOMINAL VOLTAGE : 12 V
- NOMINAL CAPACITY(20 hrs) : 9Ah
- DIMENSIONS
 - TOTAL HEIGHT : 100 mm (3.94 inches)
 - CONTAINER HEIGHT : 94 mm (3.70 inches)
 - LENGTH : 151 mm (5.95 inches)
 - WIDTH : 65 mm (2.56 inches)
- WEIGHT : APPROX 2.44 Kg (5.37 lbs)
- MAX DISCHARGE CURRENT : 135A (5 sec)
- STANDARD TERMINALS : FASTON TAB 187
- CONTAINER MATERIAL : GENERAL GRADE ABS


☆ CHARACTERISTICS

- CAPACITY 25 °C / 68 °F
 - 20 hr @ 0.45 A : 9 Ah
 - 5 hr @ 1.44 A : 7.2 Ah
 - 1 hr @ 6.14 A : 6.14 Ah
 - 1 C @ 9 A : 4.5 Ah
- INTERNAL RESISTANCE : 18 mΩ
- CHARGING VOLTAGE (20°C, 68 °F)
 - STANDBY USE : 2.275 ± 0.025 V/CELL
 - : (-3.3mV / °C / CELL)
 - CYCLE USE : 2.275 ± 0.025 V/CELL
 - : (-5mV / °C / CELL)
- MAX CHARGING CURRENT : 2.7 A


Discharge Characteristics 20 °C (68 °C)

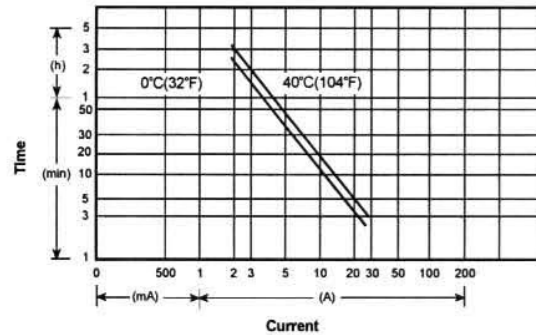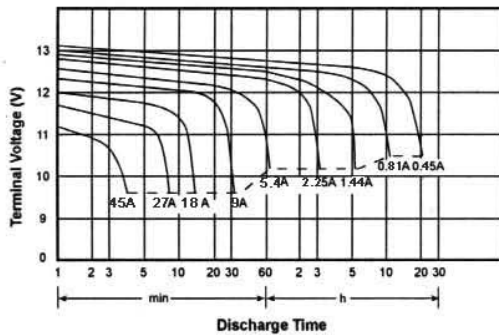

☆ Dimensions

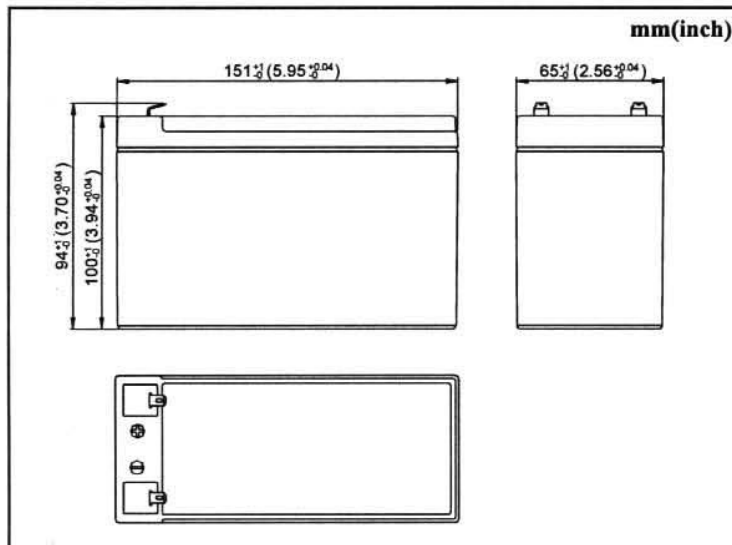

☆ Terminal

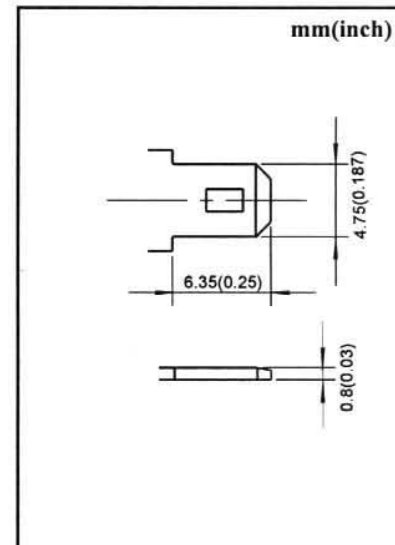

Empire Scientific - 151 East Industry Court, Deer Park, NY 11729
 Phone: 1-(800) 645-7220 Fax: 1-(800) 343-5733
 Visit us on the web: <http://www.empirescientific.com>
 Email: sales@empirescientific.com